

AB COCKS ABZ

ABZ 12 X-KAF, PN250, 1/4"-18NPT/S12



Product details

- » Straight through cock
- » PN250
- » Cylindrical plug
- » Stainless steel X
- » Elastic packing sleeve KAF
- » With hand lever

General features

- » 90°-rotation ensures immediate opening and closing procedure
- » Hand operation enables throttling, therefore usage in blow-down lines possible
- » Simple maintenance: The packing sleeve can be replaced within minutes with the cock staying in the line
- » No jamming caused by corrosion


Connections

Left side: 1/4"-18NPT
Right side: compression type fitting S12

Certificates VDI 2440

Temperature X-KAF -200°C to +400°C, PN250

Dimensions Body length 70 mm

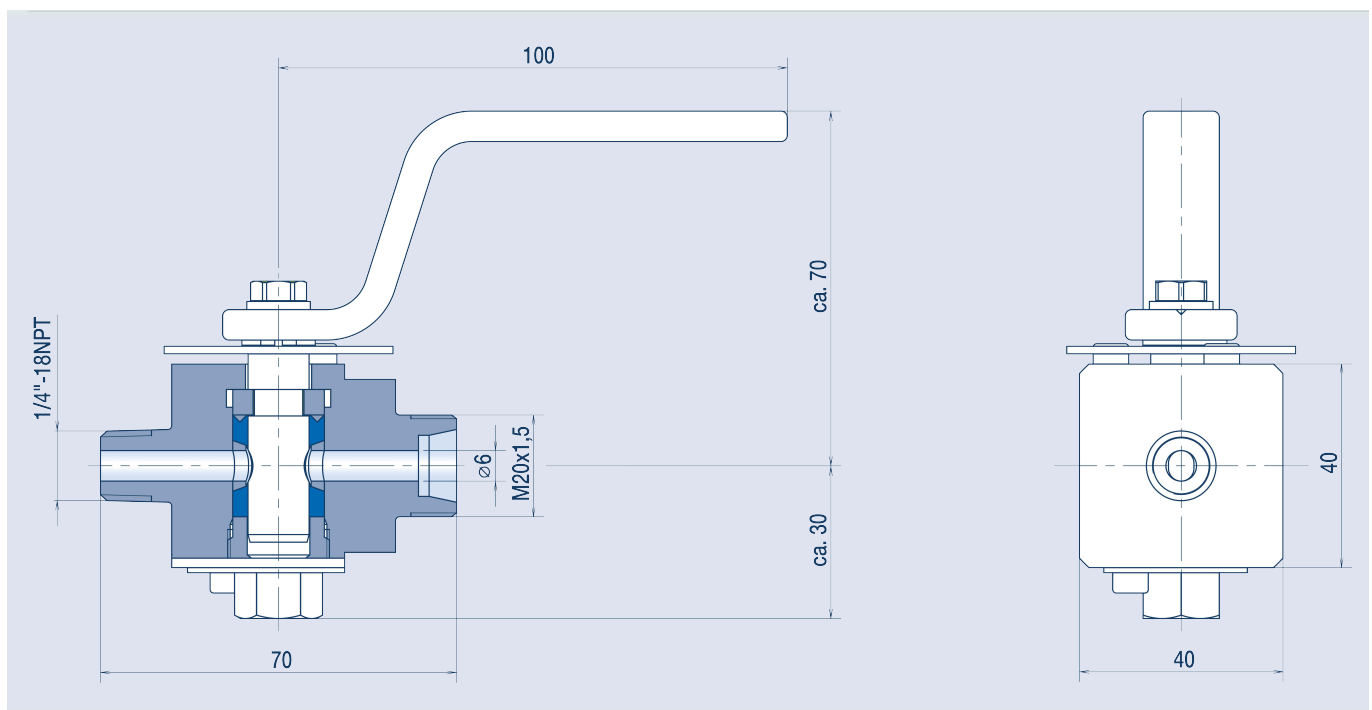

Application range

District Heating | Processing industry | Automation | Geothermal energy | Shipbuilding industry | Diesel engines | Oil & Gas | Compressed-air supply | Instrumentation & Control | Electric supply | Energy generating companies


The packing sleeve

Under pressure the lamellas of the elastic packing sleeve are pressed against the body wall and thereby an excellent seal is achieved. The KAF is suitable for high temperatures up to 400°C.



AB COCKS ABZ

Pressure and temperature ranges / Parts list

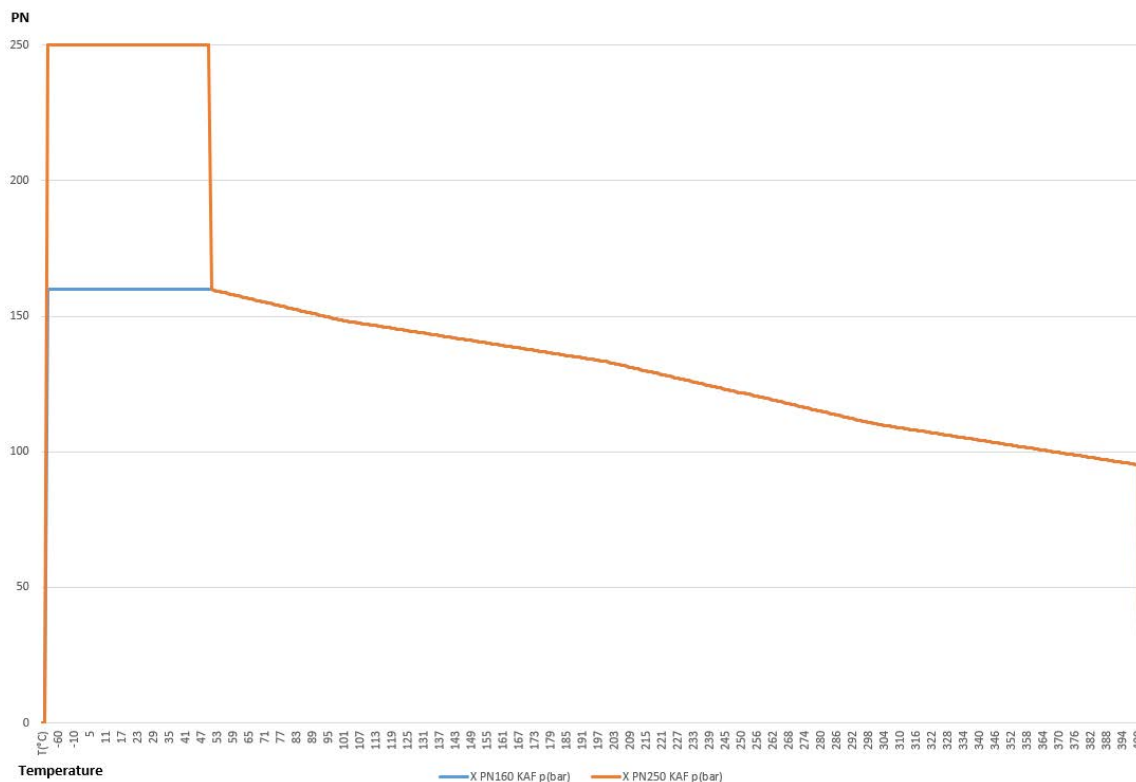

Parts list

Pos.	number	name
1	1	Body
2	1	Packing sleeve
3	1	Cock plug
4	2	Split ring
5	1	Tightening nut
6	1	Locking disc
7	3	Fillister head screw
8	1	Stop
9	1	Secure ring
10	1	Hand lever
11	1	Disc
12	1	Hexagon head screw
13	1	Gasket
14	1	Screw plug

